


*Pin C4 → Stummerschaltung

| Block A | |
|---------|---------------------|
| 1 | Battery |
| 2 | Illumination -ve |
| 3 | Ignition |
| 4 | Illumination +ve |
| 5 | Vehicle Alarm |
| 6 | Power Ground |
| 7 | Switched A+/Antenna |
| 8 | Not Used |

| Block B | |
|---------|---------------|
| 1 | Left Front + |
| 2 | Left Front - |
| 3 | Left Rear + |
| 4 | Left Rear - |
| 5 | Right Front + |
| 6 | Right Front - |
| 7 | Right Rear + |
| 8 | Right Rear - |

| Block C | | MY 96 | 4000 | 5/6000 | 7000 |
|---------|---------------------|-------|------|--------|------|
| 1 | ACP + | ✓ | | ✓ | ✓ |
| 2 | ACP - | ✓ | | ✓ | ✓ |
| 3 | Parking Aid Mute | | | ✓ | ✓ |
| 4 | Phone Mute | ✓ | ✓ | ✓ | ✓ |
| 5 | Ground/Phone Shield | ✓ | ✓ | ✓ | ✓ |
| 6 | AVC | ✓ | ✓ | ✓ | ✓ |
| 7 | --- | | | | |
| 8 | Phone Audio #1 | | | ✓ | ✓ |
| 9 | Phone Audio #2 | | | ✓ | ✓ |
| 10 | Clock Select | ✓ | ✓ | ✓ | ✓ |
| 11 | Analog Remote #1 | | ✓ | ✓ | ✓ |
| 12 | Analog Remote #2 | | ✓ | ✓ | ✓ |
| 13 | SCP + | | | | ✓ |
| 14 | SCP - | | | | ✓ |
| 15 | NVA Mute | | | | ✓ |
| 16 | NVA #1 | | | | ✓ |
| 17 | NVA #2 | | | | ✓ |




| CD Multi-Changer | | | |
|------------------|---------------|----|----------------------------|
| 1 | ACP + | 7 | ACP - |
| 2 | ACP Shield | 8 | ACP Enable (CD Enable) |
| 3 | Power Ground | 9 | CD Power (Battery unfused) |
| 4 | N/C | 10 | Audio Shield |
| 5 | Left Audio + | 11 | Left Audio - |
| 6 | Right Audio + | 12 | Right Audio - |

Ford Radio 6000 Anschlussplan ab '99⁴

A. Antenne

B. Spannungsversorgung

Lautsprecher

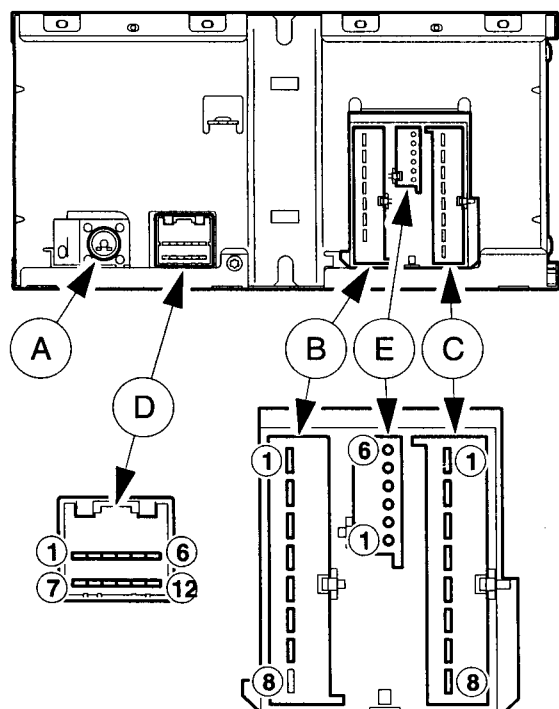

1. +12 V Batterie
2. Frontplattenbeleuchtung -
3. +12 V Zündung
4. Frontplattenbeleuchtung +
5. Diebstahlwarnanlage
6. Masse
7. +12 V geschaltet
8. Frei

1. Frontlautsprecher links +
2. Frontlautsprecher links -
3. Hecklautsprecher links +
4. Hecklautsprecher links -
5. Frontlautsprecher rechts +
6. Frontlautsprecher rechts -
7. Hecklautsprecher rechts +
8. Hecklautsprecher rechts -

TIL3808014

D. CD-Wechsler

E. Fernbedienung

- | | |
|--------------------|-----------------------------|
| 1. ACP + | 7. ACP - |
| 2. ACP-Abschirmung | 8. ACP-Freigabe/CD-Freigabe |
| 3. Masse | 9. +12 V-Ausgang |
| 4. Frei | 10. Audio-Abschirmung |
| 5. Audio rechts + | 11. Audio rechts - |
| 6. Audio links + | 12. Audio links - |

1. ACP +
2. ACP -
3. Frei
4. Stummschaltung-Autotelefon
5. Masse
6. AVC